

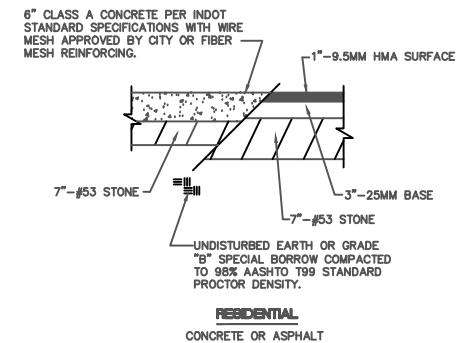
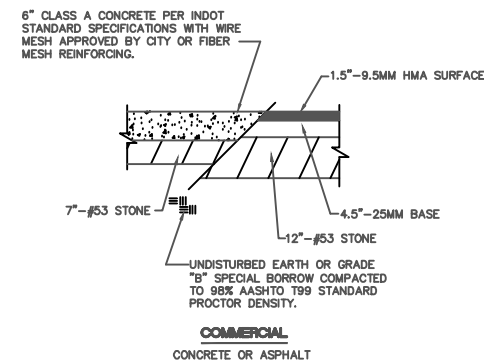


1. THE CONTRACTOR/DEVELOPER SHALL PROVIDE AND INSTALL ALL STREET NAME AND ROAD SIGNS PER CURRENT INDOT STANDARDS AND CITY OF COLUMBUS GUIDELINES AND DETAILS. ALL TRAFFIC CONTROL DEVICES SHALL COMPLY WITH THE CURRENT IMUTCD.
2. MATERIALS SHALL BE FREE OF BURRS, PITS, AND BLEMISHES AND SHALL PRESENT A SMOOTH CLEAN SURFACE.
3. SIGN BLANKS SHALL MEET INDOT SPECIFICATIONS UNLESS OTHERWISE SPECIFIED.
4. ALL STREET SIGNS SHALL HAVE GREEN BACKGROUND WITH WHITE LETTERS/NUMBERS ON EXTRUDED ALUMINUM BLADES.
5. THE STREET NAME LETTERS TO BE HIGH INTENSITY PRISMATIC; 9" BLADE WITH 6" INITIAL UPPER-CASE LETTER/NUMBER FOLLOWED BY 4.5" LOWER-CASE LETTERS.
6. STOP SIGNS SHALL BE 30" DIAMOND GRADE OR HIGH INTENSITY PRISMATIC.
7. SIGN BOLTS TO BE PER INDOT STANDARD SPECIFICATIONS. BOLTS ARE TO BE THEFT PROOF.
8. SPEED LIMIT SIGNS SHALL BE 24" X 30" PRISMATIC HIGH INTENSITY.
9. SIGN POST SHALL BE DRIVEN INTO THE GROUND. NO EXCAVATION SHALL BE DONE TO PLACE SIGNS.

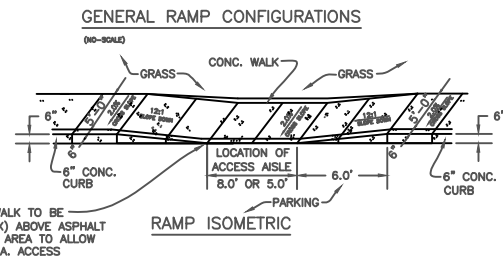


NOT TO SCALE WITHIN RIGHT OF WAY

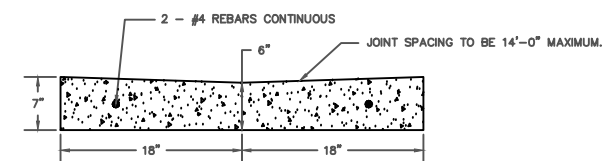


NOT TO SCALE


NOT TO SCALE

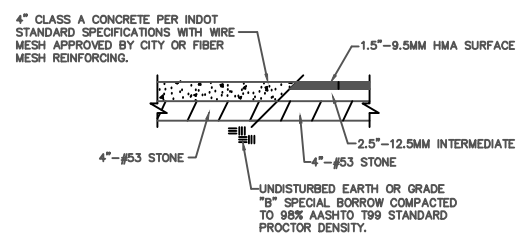


NOT TO SCALE

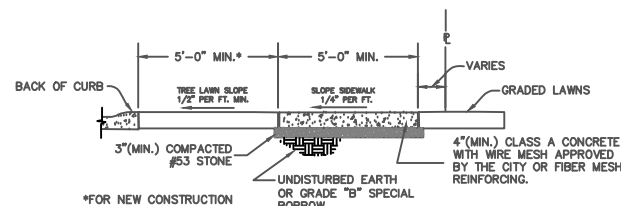


NOT TO SCALE

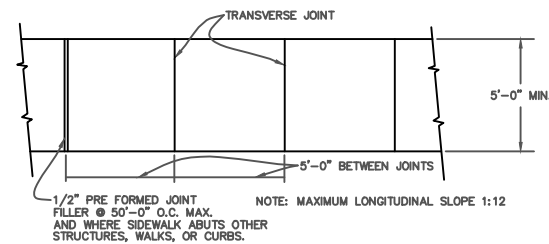

NOT TO SCALE

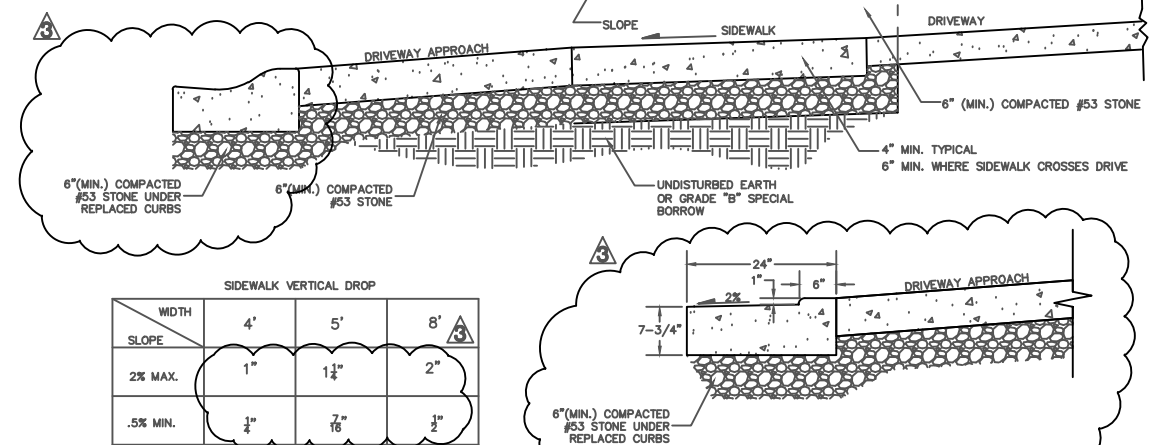

(TYPE II OR TYPE III CURBS)

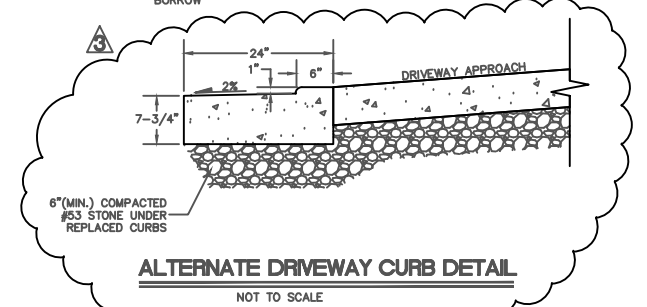

NOT TO SCALE